




Inverter technology for everyone

- New range available with 100% Inverter technology
- Rapid rise and precise maintenance of the desired temperature
- Designed to operate at temperatures as low as -7°C
- Handy user interface
- Very quiet operation
- Winter cover supplied
- Anti-vibration pads supplied
- Available in 5 models, catering for pool volumes up to 70 m³



7 segments user friendly user interface

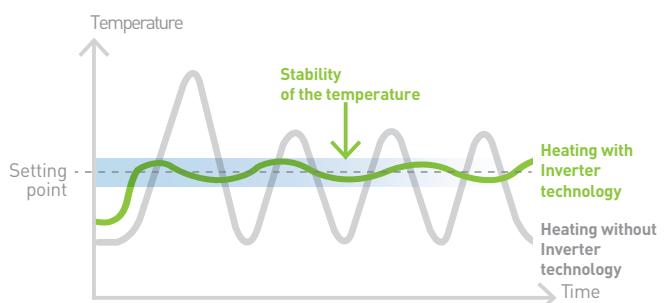

SUSTAINABLE

Made of high quality parts, proximity of the after sales service

NEW R32 FLUID HIGHER PERFORMANCE

- Reduces greenhouse gas emissions by 2/3
- 10 % less fluid
- Easy to use and to recycle
- No impact on the ozone layer

QUIET

Operation mode available

Reference	Unit	81504	81514	81524	81534	81544		
Power supply		220V-240V ~ /1ph/50Hz						
Refrigerant fluid	/	R32						
Global warming potential	/	675						
Mass of refrigerant	kg	0,35	0,43	0,45	0,65	0,67		
Mass inTeqCO ₂	/	0,24	0,29	0,30	0,44	0,45		
Range of heating power (1) Air 27 °C - RH 78% - Water 26 °C	kW	1,62 - 6,72	2,70 - 8,15	2,36 - 11,45	3,70 - 15,64	2,73 - 17,87		
Electrical power input (1)	kW	0,15 - 1,05	0,21 - 1,11	0,17 - 1,80	0,30 - 2,82	0,22 - 3,33		
Input current (1)	A	1,02 - 4,88	1,54 - 5,00	1,19 - 7,85	1,49 - 12,28	1,44 - 14,62		
COP (1)	/	11,03 - 6,41	12,78 - 7,33	13,88 - 6,35	12,27 - 5,55	12,50 - 5,33		
Heating power range (2) Air 15 °C - RH 71% - Water 26 °C	kW	1,53 - 5,38	1,75 - 5,83	1,56 - 8,00	2,96 - 12,18	2,60 - 13,77		
Electrical power input (2)	kW	0,27 - 1,09	0,28 - 1,33	0,28 - 1,74	0,44 - 2,65	0,41 - 3,16		
COP (2)	/	5,67- 4,96	6,29 - 4,38	5,60 - 4,80	6,78 - 4,60	6,28 - 4,36		
Nominal flow rate	m ³ /h	2,80	3,50	5,00	6,50	7,40		
Hydraulic head loss	kPa	2,3	2,9	4	6,7	9		
Hydraulic connection supplied	mm	50	50	50	50	50		
Sound pressure level @1m	dB(A)	49,8	50,2	53,9	50,8	54		
Sound pressure level @10m	dB(A)	32,4	32,8	34,2	33,8	37,25		
Type of fan		Axial DC Inverter						
Number of fans		1						
Type of compressor		Panasonic Twin Rotary DC Inverter			Highly Twin Rotary DC Inverter			
Reversible heat pump		Yes						
Defrost mode		Reverse cycle						
Silent mode		Yes						
Winter cover		Yes						
Heating priority function		Yes						
Anti-vibration pads		Supplied						
User control box		7 segments 3 buttons user interface						
Net dimensions of entire unit	mm	1000 / 418 / 605			1047/453/768	1160/490/862		
Net weight / total weight	kg	43	47	51	66	74		
Recommended pool volume*	m ³	<23	<30	<45	<55	<70		
Warranty		2 years						
EAN		3660149610231	3660149610248	3660149610316	3660149610323	3660149610675		

(*) Recommended volume for a pool equipped with a heat retention cover during use from May to September.